


Vibe 55” digital whiteboard

Empower your teams to collaborate, innovate, and ideate like never before with Vibe.



Vibe Specifications

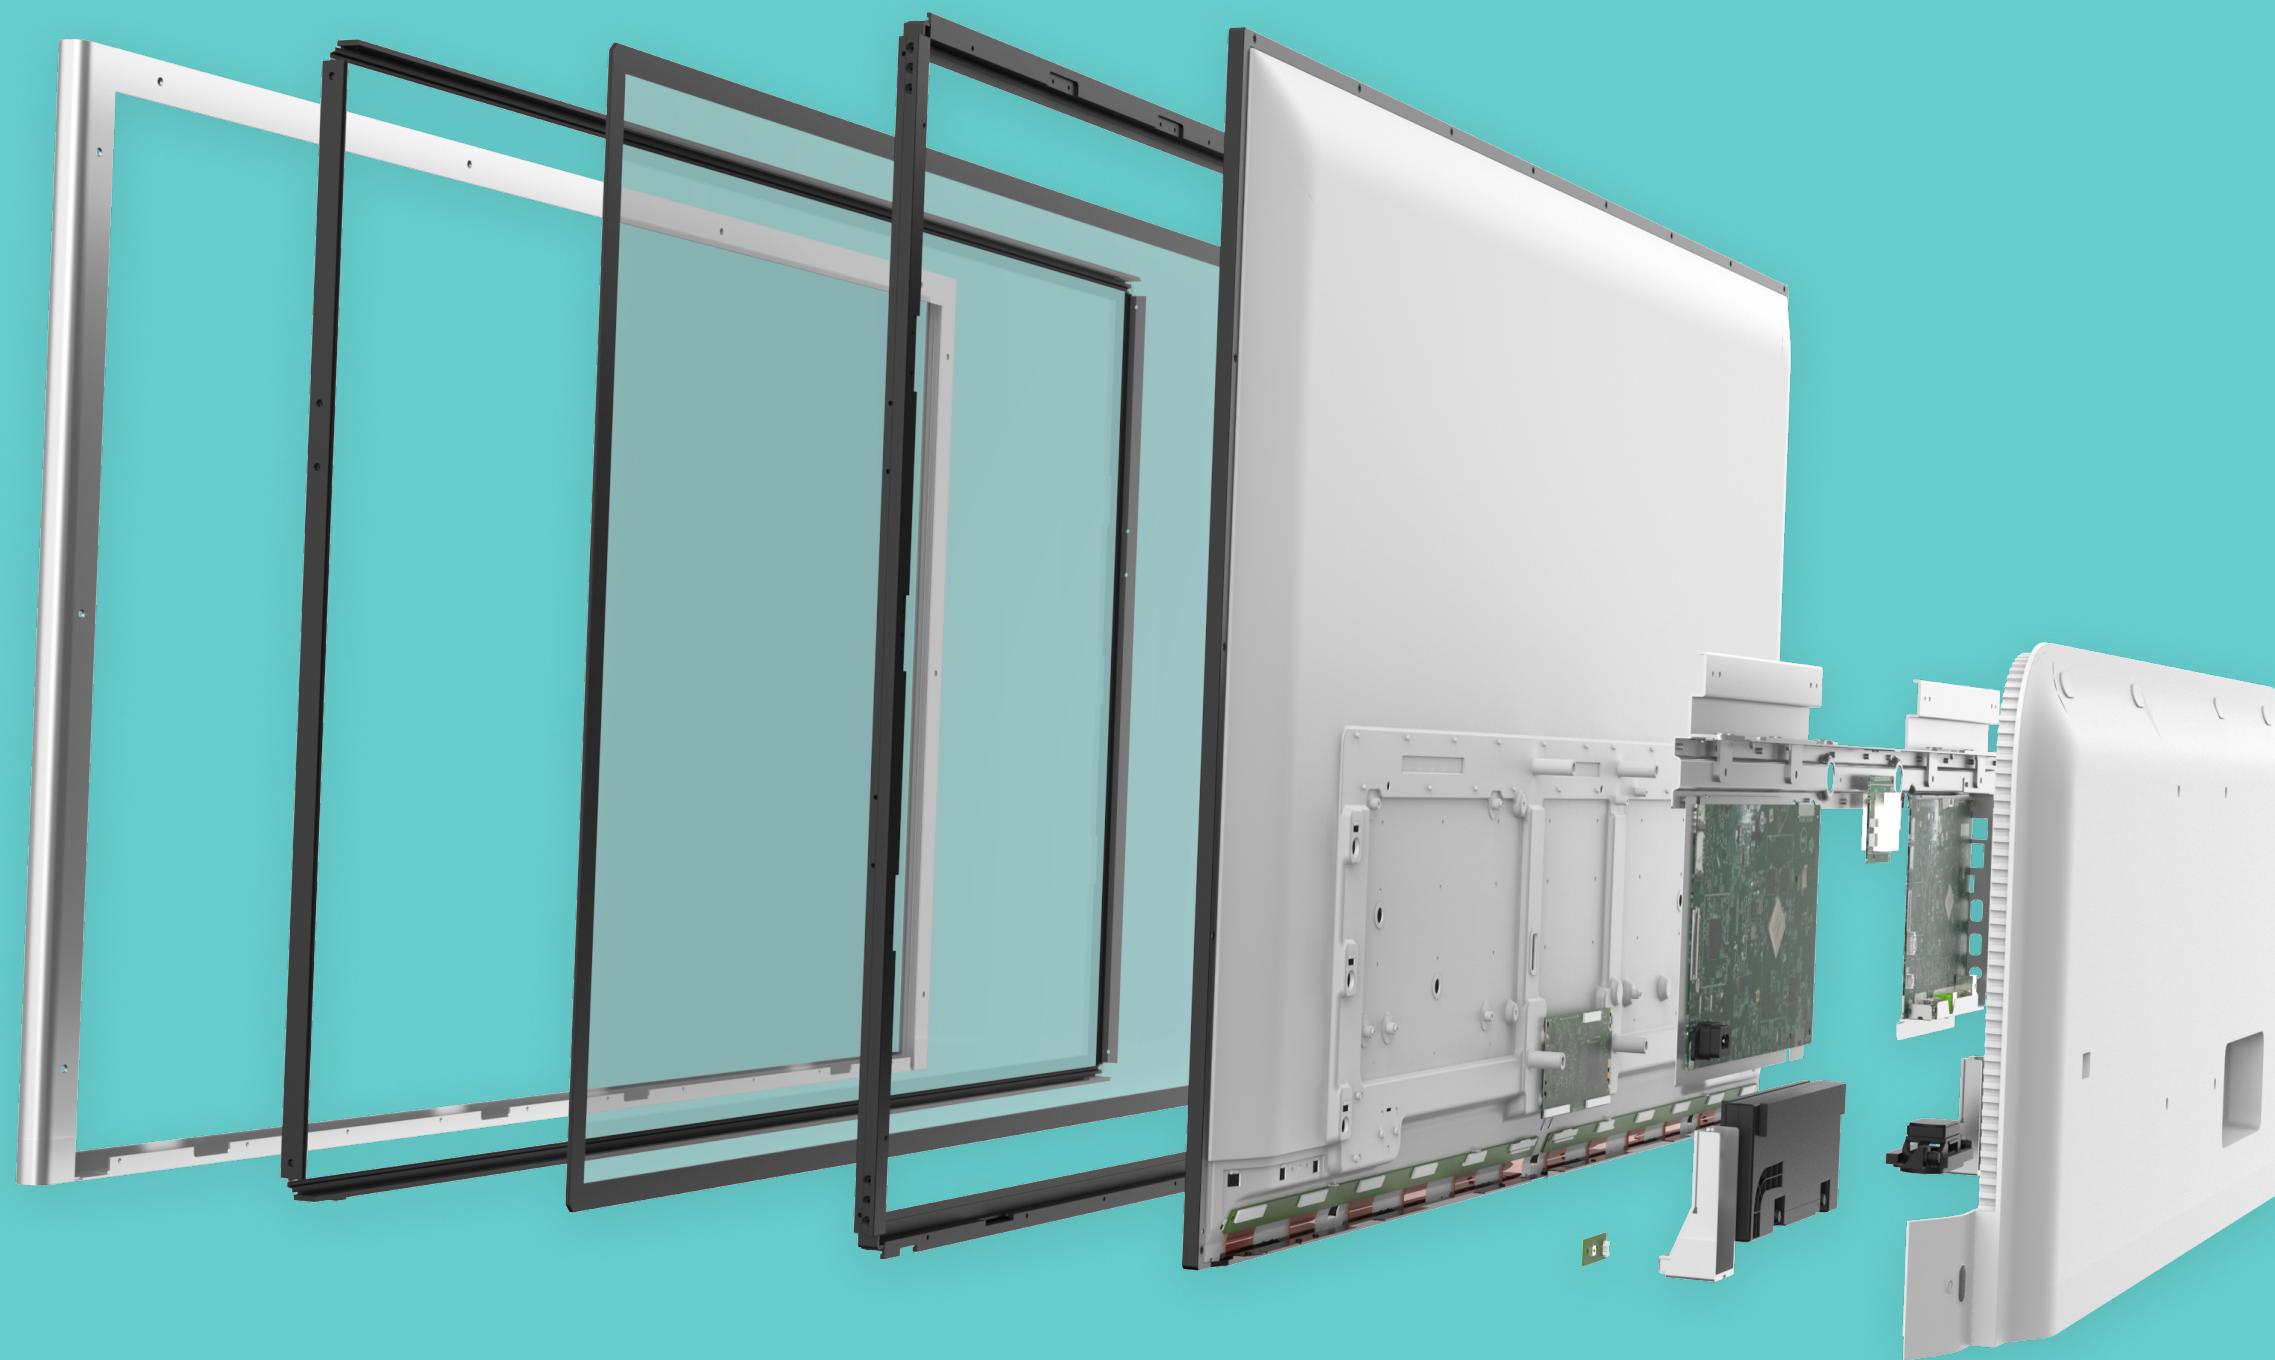

Panel

Diagonal Screen Size	55"
Optimum Resolution	3840(H) X 2160 (V) @ 60HZ
Brightness	300-350 cd/m ²
Contrast Ratio(Typical)	1200 : 1
Response Time(Typical)	8ms
Pixel Pitch	0.315 mm x 0.315mm
Anti-Glare Coating	Yes
Aspect Ratio	16 : 9
Color Depth	1.07G
Viewing Angle	178(H) / 178(V)
Analog	Normal 72% NTSC

Touch

Multi-Touch Technology	Infrared Touch
Touch Points	10 Simultaneous Touch Points
Protection Glass	3 mm Tempered Glass
Refresh Rate	150 Hz
Minimum Touch Object	2mm
Response Time	< 7 ms

Connections

HDMI	IN & OUT
USB	2.0, 3.0, Debug
Network	2.4G/5G Wifi, Ethernet
Audio	Audio out

System

System on Chip	Rockchip 3399
CPU	Dual-core Cortex-A72 up to 1.8 Hz Quad-core Cortex-A53 up to 1.4 Hz
GPU	Mali-T864 GPU
RAM	4GB DDR3
Storage	32GB EMMC
Operating System	VibeOS Based on Android 7.1

Board

Product Size	50.6(W) x 29.1(H) x 2.9(D) in
Package size	56.7(W) x 37(H) x 9.1(D) in
Product Weight	54.1 lb
Accessories	Power Cord, Passive Stylus x 2 Manual, Warranty Card, Wiping Cloth
VESA Mount	200 X 200 mm

Power

Power Source	AC 100 - 240V, 50 - 60 Hz
Consumption (Typical)	≤ 120 W
Consumption (Standby)	≤ 15 W

Speaker

Impedance	6Ω±15% (At 1000HZ, 1.0V with LMS)
Resonant Frequency	FB: 140Hz±20%
Sound Pressure Level	78±3dB
Effective Frequency Range	200~20KHz deviation -10dB Max
Distortion	7% Max
THD@Rated power	THD<7%

Stand (optional)

Product Size	50.9(W) x 55.2(H) x 26(D) in
Package size	57(W) x 29(H) x 10.2(D) in
Product Weight	33.1 lb
Accessories	Installation manual